


PN

- 耐高纹波,尺寸可调,85℃ 2000 小时 ,可用于大功率电源、UPS 不间断电源、变频器等电路中。
High ripple current ,Size may be selected ,Load life of 2000 hours at 85℃ .
Used large power source,Uninterruptible power supplies ,Frequency converter circuit .etc.
- ROHS 指令已对应完毕。Adapted to the ROHS directive



主要技术性能 Specifications

项目 Item	特性 Performance Characteristics					
使用温度范围 Operating temperature range	-40℃ ~+ 85℃			-25℃ ~ +85℃		
额定电压范围 Rated voltage range	10 ~ 100 V			160 ~ 500 V		
标称电容量允许偏差 Capacitance tolerance	±20% (120Hz, +20℃)					
漏电流 Leakage current	I ≤ 0.01CV(μA)或5mA 5分钟 取较小值 (at 20℃, after 5 minutes ,Whichever is smaller)					
损耗角正切值 (tg δ) Dissipation factor (+20℃, 120Hz)	小于图表中规定的数值 Less than the value specified in the standard products tables					
温度特性 Temperature characteristics (Impedance ratio at 120Hz)	Rated Voltage (V)	10~50	63~100	160~250	350~450	500
	Z _{-25℃} /Z _{20℃}	4	3	5	8	9
	Z _{-40℃} /Z _{20℃}	12	10			
高温贮存 Shelf life	+85℃,1000 小时贮存后,加额定工作电压处理 30 分钟,恢复 16 小时后: After storage for 1000 hours at +85℃ , U _R to be applied for 30 minutes and then resumed 16 hours 电容量变化率 Capacitance change : ±20%初始测量值以内 Initial measured value 漏电流 Leakage current : ≤初始规定值 Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 2times Initial specified value					


	使用寿命 (Useful Life)		负载寿命 (Load Life)	耐久性测试 (Endurance Test)
寿命时间 (Lifetime)	4000h	>65000h	2000h	2000h
漏电流 (Leakage Current)	≤初始规定值 Not more than specified value		≤初始规定值 Not more than specified value	≤初始规定值 Not more than specified value
电容量变化率 (Caacitance Change)	±30%初始测量值内 Within ±30% initial value		±20%初始测量值内 Within ±20% initial value	±10%初始测量值内 Within ±10% initial value
损耗角正切值 (Dissipation Factor)	≤3 倍初始规定值 Not more than 300% of specified value		≤2倍初始规定值 Not more than 200% of specified value	≤1.3 倍初始规定值 Not more than 130% of specified value
应用条件 (Condition): 应用电压 (Applied Voltage) 应用电流 (Applied Current) 应用温度 (Applied Temperature) 失效率 (Outlier Percentage)	U _R I _R 85℃ ≤1%	U _R 1.2×I _R 40℃ ≤1%	U _R I _R 85℃ 0%	U _R I _R =0 85℃ IEC60384

纹波电流的相关参数 Multiplier for Ripple Current

频率系数 Frequency Coefficient

Frequency (Hz)	50	100 (120)	300	1k	3k	10K	≥20K
Rated Voltage (V) 10~50	0.95	1.00	1.04	1.10	1.12	1.15	1.15
63~100	0.95	1.00	1.06	1.16	1.22	1.30	1.36
160~500	0.80	1.00	1.10	1.25	1.35	1.50	1.55

寿命时间图 Life Time Graph

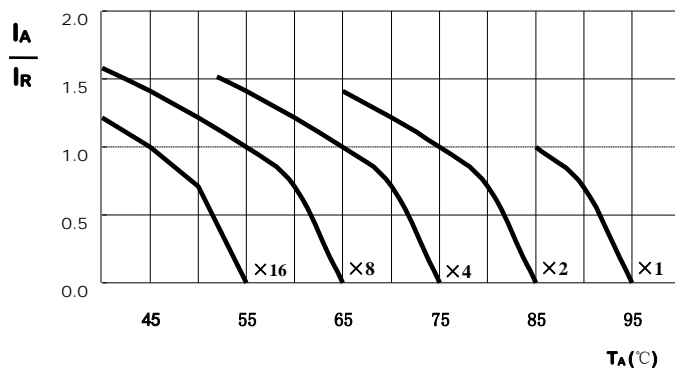

此图表示电容的使用寿命时间

The graphs shows a typical trend of the standard capacitor useful life.

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D×L
(V)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)
10 (13)	33000	0.80	34.7	20.5	4.3	35×50
	39000	0.80	29.4	17.6	4.7	35×50
	47000	0.80	24.4	14.6	5.2	35×65
	56000	0.80	20.5	12.5	6.1	35×80
	68000	0.80	16.9	10.1	6.7	35×80
	82000	0.80	14.0	9.0	7.7	35×100
	100000	0.80	11.5	7.5	8.8	35×100
	120000	0.80	9.6	7.1	10.0	35×120
	150000	1.00	9.6	6.5	10.8	35×120
	180000	1.00	8.0	6.0	12.0	51×95
	220000	1.50	9.8	5.0	11.2	51×120
	270000	1.50	8.0	4.4	12.8	51×120
	330000	1.50	6.5	3.8	15.3	63.5×95
	390000	1.50	5.5	3.4	17.3	63.5×115
	470000	2.00	6.1	2.9	18.7	63.5×130
	560000	2.00	5.1	2.7	19.0	76×115
680000	2.00	4.2	2.5	21.7	76×130	
820000	2.00	3.5	2.4	24.7	76×155	
16 (20)	22000	0.60	39.1	22.0	4.1	35×50
	27000	0.60	31.8	19.1	4.5	35×50
	33000	0.60	26.1	15.7	5.0	35×50
	39000	0.60	22.0	13.1	5.9	35×65
	47000	0.60	18.3	11.0	6.4	35×80
	56000	0.60	15.4	9.5	7.3	35×80
	68000	0.60	12.6	7.9	8.4	35×100
	82000	0.80	14.0	6.8	8.3	35×100
	100000	0.80	11.5	5.8	9.5	35×120
	120000	0.80	9.6	5.1	10.9	35×120
	150000	1.00	9.6	4.4	11.3	51×95
	180000	1.00	8.0	4.0	12.8	51×115
	220000	1.00	6.5	3.4	15.3	51×130
	270000	1.00	5.3	3.0	16.6	63.5×95
	330000	1.50	6.5	2.8	17.8	63.5×115
	390000	1.50	5.5	2.6	18.3	63.5×130
470000	1.50	4.6	2.4	21.3	76×120	
560000	1.50	3.8	2.2	23.6	76×130	
680000	1.50	3.2	2.0	27.6	76×155	
820000	2.00	3.5	1.9	27.1	89×155	
25 (32)	15000	0.50	47.8	22.0	3.7	35×50
	18000	0.50	39.8	18.0	4.1	35×50
	22000	0.50	32.6	15.8	4.5	35×50
	27000	0.50	26.5	12.8	5.0	35×65
	33000	0.50	21.7	11.0	5.9	35×80
	39000	0.50	18.4	9.4	6.7	35×80
	47000	0.50	15.2	7.8	7.7	35×100
	56000	0.60	15.4	6.8	7.9	35×100
	68000	0.60	12.6	5.8	9.1	35×120
	82000	0.60	10.5	5.1	10.4	35×120
	100000	0.80	11.5	4.4	10.3	51×95
	120000	0.8	9.6	4.0	11.7	51×115
	150000	0.8	7.6	3.4	14.1	51×130

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D×L	
(V)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	
25 (32)	180000	0.8	6.4	3.0	15.7	63.5×95	
	220000	1.0	6.5	2.8	16.1	63.5×115	
	270000	1.0	5.3	2.5	18.6	63.5×130	
	330000	1.0	4.4	2.3	21.9	63.5×155	
	390000	1.2	4.4	2.2	22.0	76×115	
	470000	1.2	3.7	2.0	25.6	76×155	
	560000	1.2	3.1	1.8	27.9	89×130	
	680000	1.2	2.5	1.5	32.6	89×155	
	35 (44)	10000	0.4	57.3	23.6	3.4	35×50
		12000	0.4	47.8	20.0	3.7	35×50
15000		0.4	38.2	17.0	4.2	35×65	
18000		0.4	31.8	13.7	4.9	35×80	
22000		0.4	26.1	11.6	5.7	35×80	
27000		0.4	21.2	9.4	6.3	35×100	
33000		0.4	17.4	9.0	7.2	35×100	
39000		0.5	18.4	8.2	7.3	35×120	
47000		0.5	15.2	7.9	8.7	51×95	
56000		0.6	15.4	7.6	8.6	51×95	
68000		0.6	12.6	6.0	9.8	51×115	
82000		0.6	10.5	4.8	11.6	63.5×95	
100000		0.6	8.6	4.0	13.3	63.5×115	
120000		0.6	7.2	3.9	14.8	63.5×120	
150000		0.8	7.6	3.6	14.9	63.5×130	
180000		0.8	6.4	3.2	17.0	76×115	
220000	0.8	5.2	2.9	20.0	76×130		
270000	1.0	5.3	2.5	20.3	76×155		
330000	1.0	4.4	2.3	23.5	89×130		
390000	1.0	3.7	2.0	26.4	89×155		
470000	1.0	3.1	1.8	29.6	89×155		
50 (63)	5600	0.3	76.7	46.0	3.0	35×50	
	6800	0.3	63.2	38.0	3.3	35×50	
	8200	0.3	52.4	31.4	3.6	35×50	
	10000	0.3	43.0	25.8	4.0	35×65	
	12000	0.3	35.8	21.5	4.7	35×80	
	15000	0.3	28.6	15.0	5.5	35×80	
	18000	0.3	23.9	12.0	6.2	35×100	
	22000	0.4	26.1	10.8	6.3	35×120	
	22000	0.4	27.5	11.2	6.2	51×70	
	27000	0.4	21.2	9.5	7.1	35×120	
	33000	0.4	17.4	8.9	8.2	51×95	
	39000	0.5	18.4	8.2	8.1	51×95	
	47000	0.5	15.2	7.6	9.3	51×115	
	56000	0.5	12.8	6.4	10.5	63.5×95	
	68000	0.5	10.5	5.3	12.0	63.5×95	
	82000	0.5	8.7	4.2	13.7	63.5×115	
93000	0.5	8.5	4.1	14.2	63.5×130		
100000	0.6	8.6	3.9	14.7	76×115		
120000	0.6	7.2	3.3	16.7	76×115		
150000	0.6	5.7	3.0	19.3	76×130		
180000	0.6	4.8	2.5	21.9	76×155		
220000	0.6	3.9	2.0	21.4	89×130		
270000	0.6	3.2	1.8	24.6	89×155		

UR (SV)	Capac - itance	Dissip ation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D×L
(V)	(μ F)	-	(m Ω)	(m Ω)	(Arms)	(mm)
63 (79)	3900	0.25	91.8	47.2	2.7	35×50
	4700	0.25	76.2	39.0	3.0	35×50
	5600	0.25	64.0	38.4	3.3	35×50
	6800	0.25	52.7	31.6	3.6	35×65
	8200	0.25	43.7	26.2	4.3	35×80
	10000	0.25	35.8	23.3	4.9	35×80
	12000	0.25	29.9	18.0	5.6	35×100
	15000	0.3	28.6	16.0	5.9	35×100
	18000	0.3	23.9	14.6	6.7	35×120
	22000	0.3	19.5	13.0	7.8	35×120
	22000	0.3	21.4	14.1	7.2	51×80
	27000	0.4	21.2	12.4	7.4	51×95
	33000	0.4	17.4	7.9	8.4	51×95
	39000	0.4	14.7	7.4	9.5	51×115
	47000	0.4	12.2	6.2	11.3	51×130
	56000	0.4	10.2	5.5	12.8	63.5×115
	59000	0.4	9.8	5.2	13.5	63.5×130
	68000	0.5	10.5	5.3	12.7	63.5×120
	82000	0.5	8.7	4.4	14.5	63.5×130
	93000	0.5	8.4	4.3	14.8	63.5×130
100000	0.5	7.2	3.6	16.7	76×115	
120000	0.5	6.0	3.0	18.9	76×130	
150000	0.5	4.8	2.4	22.4	76×150	
150000	0.5	4.8	2.4	22.4	76×155	
180000	0.6	4.8	2.4	22.4	89×130	
220000	0.6	3.9	2.0	26.2	89×155	
80 (100)	3300	0.25	109	54.0	2.5	35×50
	3900	0.25	91.8	46.0	2.8	35×50
	4700	0.25	76.2	38.1	3.0	35×65
	5600	0.25	64.0	32.0	3.6	35×80
	6800	0.25	52.7	26.4	3.9	35×80
	8200	0.25	43.7	22.1	4.5	35×80
	10000	0.25	42.5	21.5	4.8	35×70
	10000	0.25	35.8	17.1	5.2	35×100
	12000	0.25	29.9	15.0	5.9	35×100
	15000	0.25	23.9	12.0	6.8	35×120
	18000	0.25	19.9	10.4	7.8	35×120
	22000	0.30	19.5	9.8	8.0	51×95
	27000	0.30	15.9	8.0	9.2	51×95
	33000	0.30	13.0	6.5	10.5	51×115
	39000	0.30	11.0	6.0	12.0	51×130
	47000	0.30	9.2	4.9	13.6	63.5×115
	47000	0.30	9.2	4.9	13.6	64×115
56000	0.40	10.2	4.3	13.4	63.5×130	
68000	0.40	8.4	4.0	15.4	76×115	
82000	0.40	7.0	3.5	17.5	76×130	
100000	0.40	5.7	2.8	20.5	76×155	
120000	0.40	4.8	2.4	22.4	89×130	
100 (125)	1800	0.25	199	48.2	1.9	35×50
	2200	0.25	163	44.0	2.1	35×50
	2700	0.25	133	38.5	2.3	35×50
	3300	0.25	109	34.6	2.6	35×65
	3900	0.25	91.8	28.4	3.0	35×80
	4700	0.25	76.2	26.3	3.5	35×80
	5600	0.25	64.0	23.0	3.9	35×100
6800	0.25	52.7	21.8	4.5	35×100	

技术参数 Technical data

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D×L
(V)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)
250 (300)	5600	0.25	64.0	14.2	7.8	63.5×95
	6800	0.25	52.7	11.8	9.1	63.5×115
	8200	0.25	43.7	11.1	10.0	63.5×115
	10000	0.25	35.8	10.7	11.7	63.5×130
	12000	0.25	29.9	9.2	12.9	76×115
	15000	0.25	23.9	7.3	15.1	76×130
	18000	0.25	19.9	5.8	17.7	76×155
	22000	0.25	16.3	3.2	20.9	89×155
	350 (400)	390	0.20	735	268	1.7
470		0.20	610	228	2.2	35×80
560		0.20	512	190	2.4	35×80
680		0.20	421	152	2.6	35×80
820		0.20	349	126	3.1	35×100
1000		0.20	287	104	3.4	35×100
1200		0.20	239	85.8	3.8	51×75
1500		0.20	191	72.2	4.3	51×75
1800		0.20	159	58.2	5.1	51×95
2200		0.20	130	47.9	5.7	51×95
2700		0.20	107	39.0	7.1	51×130
3300		0.20	86.8	32.1	7.9	51×130
3900		0.20	73.5	27.8	9.0	63.5×115
4700		0.20	61.0	25.0	10.3	63.5×130
5600		0.20	51.2	22.5	11.4	76×115
6800		0.20	42.1	17.1	13.1	76×130
8200		0.20	34.9	14.4	15.4	76×155
10000		0.20	28.6	11.5	18.1	89×155
12000	0.20	23.9	9.8	20.0	89×155	
15000	0.20	19.1	7.9	24.5	89×195	
18000	0.20	15.9	6.5	28.8	89×235	
400 (450)	330	0.20	868	280	1.5	35×50
	390	0.20	735	236	2.0	35×80
	470	0.20	610	189	2.2	35×80
	560	0.20	512	163	2.4	35×80
	680	0.20	421	132	2.8	35×100
	820	0.20	349	107	3.1	35×100
	1000	0.20	287	85	3.5	51×75
	1200	0.20	239	72	3.8	51×75
	1500	0.20	191	58.0	4.7	51×95
	1800	0.20	159	47.2	5.5	51×95
	2200	0.20	130	38.1	6.4	51×120
	2700	0.20	107	33.2	7.0	63.5×95
	3300	0.20	86.8	31.2	8.2	63.5×115
	3900	0.20	73.5	25.1	9.4	63.5×130
	4700	0.20	61.0	23.7	10.4	76×115
	5600	0.20	51.2	19.0	11.9	76×130
	6800	0.20	42.1	15.5	14.1	76×155
	8200	0.20	34.9	13.5	16.4	89×155
10000	0.20	28.6	11.1	18.3	89×155	

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D×L	
(V)	(μF)	-	(mΩ)	(mΩ)	(Arms)	(mm)	
100 (125)	8200	0.25	43.7	20.0	5.1	35×120	
	8200	0.25	46.4	22	5.0	50×80	
	10000	0.25	35.8	18.7	5.9	35×120	
	10000	0.25	44.5	20	5.2	50×80	
	12000	0.25	29.9	16.0	6.4	51×75	
	15000	0.25	23.9	11.5	7.0	51×95	
	15000	0.25	22.4	11.2	7.5	51×110	
	18000	0.25	19.9	9.8	8.3	51×115	
	22000	0.25	16.5	7.8	10.1	51×120	
	22000	0.25	16.3	7.9	10.0	51×130	
	22000	0.25	16.2	7.8	10.0	63.5×115	
	27000	0.25	13.3	6.8	11.5	63.5×115	
	33000	0.25	10.9	5.5	11.9	63.5×130	
	39000	0.25	9.2	4.9	13.4	76×115	
	47000	0.35	10.7	5.5	14.2	76×130	
	56000	0.35	9.0	4.0	16.0	76×155	
	56000	0.35	9.0	4.0	16.0	89×130	
	68000	0.35	7.4	3.4	18.8	89×130	
	82000	0.35	6.1	3.0	20.5	89×155	
	100000	0.35	5.0	2.5	24.0	89×170	
160 (200)	3300	0.25	109	30.7	5.2	35×120	
	3900	0.25	91.8	26.2	5.3	51×75	
	4700	0.25	76.2	20.8	5.9	51×75	
	5600	0.25	64.0	18.8	7.0	51×95	
	6800	0.25	52.7	16.2	7.8	51×95	
	8200	0.25	43.7	13.5	9.1	51×115	
	10000	0.25	35.8	12.9	10.4	63.5×95	
	12000	0.25	29.9	10.2	11.3	63.5×95	
	15000	0.25	23.9	9.0	14.3	63.5×130	
	18000	0.25	19.9	7.5	15.6	63.5×130	
	22000	0.25	16.3	6.4	18.3	76×130	
	27000	0.25	13.3	5.2	20.2	76×130	
	33000	0.25	10.9	3.6	23.8	89×130	
	39000	0.25	9.2	2.6	27.9	89×155	
	200 (250)	2200	0.25	163	38.5	3.9	35×100
		2700	0.25	133	26.4	4.7	35×120
		3300	0.25	109	23.5	4.9	51×75
		3900	0.25	91.8	21.4	5.3	51×75
4700		0.25	76.2	19.5	6.4	51×95	
5600		0.25	64.0	17.5	7.6	51×115	
6800		0.25	52.7	13.7	8.8	51×130	
8200		0.25	43.7	11.3	9.4	63.5×95	
10000		0.25	35.8	9.4	10.4	63.5×95	
12000		0.25	29.9	8.6	12.4	76×95	
15000		0.25	23.9	7.3	14.4	76×95	
18000		0.25	19.9	5.9	16.5	76×130	
22000		0.25	16.3	4.1	19.6	76×155	
27000		0.25	13.3	3.2	21.5	89×130	
33000		0.25	10.9	2.5	25.3	89×155	
250 (300)		1500	0.25	239	49.1	3.2	35×100
		1800	0.25	199	41.1	3.5	35×100
		2200	0.25	163	32.5	4.0	51×75
	2700	0.25	133	27.7	4.4	51×75	
	3300	0.25	109	23.1	5.4	51×95	
	3900	0.25	91.8	20.0	6.3	51×115	
	4700	0.25	76.2	16.5	7.1	63.5×95	

UR (SV)	Capacitance	Dissipation Factor	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Ripple Current 85°C, 120Hz	SIZE D×L
(V)	(μ F)	-	(m Ω)	(m Ω)	(Arms)	(mm)
400 (450)	12000	0.20	23.9	9.8	21.8	89×195
	15000	0.20	19.1	8.0	26.3	89×235
450 (500)	270	0.20	1061	421	1.4	35×50
	330	0.20	868	280	1.8	35×80
	390	0.20	735	243	2.0	35×80
	470	0.20	610	200	2.2	35×80
	560	0.20	512	173	2.6	35×100
	680	0.20	421	140	2.8	35×100
	820	0.20	349	112	3.2	51×75
	1000	0.20	287	89	3.5	51×75
	1200	0.20	239	72.0	4.2	51×95
	1500	0.20	191	58.5	5.1	51×115
	1800	0.20	159	49	5.9	51×130
	2200	0.20	130	39.5	6.3	63.5×95
	2700	0.20	106	31.6	7.5	63.5×115
	3300	0.20	86.8	30.0	8.7	63.5×130
	3900	0.20	73.5	26.5	9.5	76×115
	4700	0.20	61.0	21.5	10.9	76×130
	5600	0.20	51.2	16.5	12.8	76×155
	6800	0.20	42.1	14.4	15.0	89×155
	8200	0.20	34.9	12.1	16.5	89×155
	10000	0.20	28.6	10.0	20.0	89×195
12000	0.20	23.9	8.0	23.6	89×235	
500 (550)	1000	0.25	331	106	3.5	51×100
	1500	0.25	221	70.7	4.5	51×115
	2200	0.25	150	48.2	6.4	63.5×120
	2700	0.25	122	39.2	7.6	76×120
	3300	0.25	100	32.1	8.5	76×130
	3900	0.25	85	27.2	9.8	76×150
	4700	0.25	70.5	22.5	10.5	89×130
	5600	0.25	59.2	18.9	11.8	89×150
	6800	0.25	48.7	15.5	13.6	89×170